MENUMASTER[®] Item # Commercial



Model DEC18E2 shown

Heavy Volume This category of microwave is ideal for...

Applications:

- Quick service restaurants
- Fast casual dining
- Bars & grills

Through put potential:

- Pre cooked frozen bacon, 700+ slices per hour
- 6 oz. portion of refrigerated Macaroni & Cheese,
 40+ portions per hour
- 1 lb. batch of fresh shrimp, 30+ batches per hour
- 1 baked potato, 20+ per hour

Defrost:

- Defrosts most frozen food products

. . .

Heavy Volume

Menumaster Commercial Microwave Model DEC18E2

Power Output

- 1800 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.
- Unique method of energy distribution provides superior even heating throughout the cavity.
- Interlock switch assembly is engineered for maximum durability and long life.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming. Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- See-through tempered glass outer window and lighted interior for monitoring without opening the door.
- Ample 17 liters (.6 cubic ft.) capacity accommodates a standard half-sized pan.
- Stackable to save valuable counter space.
- Interior ceramic shelf is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained.

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protects oven components.
- ETL Listed.






AIA File #:





Menumaster Commercial Microwave Model DEC18E2 | Heavy Volume

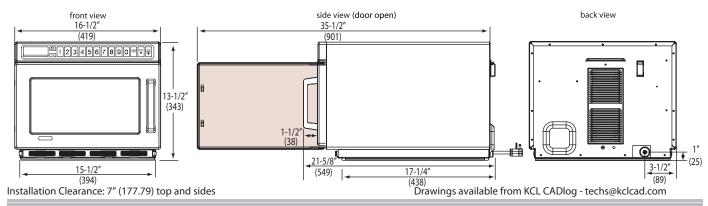

Specifications				Specificat
Model	DEC18E2 UPC Code 719881159317			Commerci
Configuration	Countertop			programm
Control System	Touch			items and
Programmable Control Pads	10			two portic style with
Settings Programmable	100			audible sig
Max. Cooking Time	60:00			temperatu
Power Levels	11			cooking st
Defrost	Yes, power level 2			level 2. Mi
Time Entry Option	Yes			two magn
Microwave Distribution	Double rotating antennas, top and bottom			superior e
Magnetrons	2			door shall and pull h
Display	LED			interior lig
Stackable	Yes			the door.
Stage Cooking	Yes, 4			modate a s
Interior Light	Yes			ceramic sh
Door Opening	Grab and pull handle			reduce pla
Signal	Adjustable, end of cycle			steel interi
Air Filter	Yes, removable, with clean filter reminder			and shelf s
Multiple Portion Setting	Yes, up to 2 portions			splatter sh removable
Exterior Dimensions	H 343 (13 ½″)	W 419 (16 ½")	D** 549 (21 5⁄8″	reminder f
Cavity Dimensions	H 171 (6 ¾")	W 330 (13")	D 305 (12")	standards
Door Depth	940mm (37″), 90°+ door open			Services, E
Usable Cavity Space	17 liter (.6 cubic ft.)			
Exterior Finish	Stainless steel			
Interior Finish	Stainless steel with sealed-in ceramic shelf			
Power Consumption	2900 W, 12.6 A			
Power Output*	1800 W* Microwave			Warranty
Power Source	230V, 50 Hz, 16 A single phase			Warranty (it on the A
Plug Configuration / Cord	CEE 7/7 "Schuko" 1.7m (5' 6")			www.acp
Frequency	2450 MHz			
Product Weight	31 kg (68 lbs.)			
Ship weight (approx.)	34 kg (74 lbs.)	_		

L 625 (24 ⁵/₈")

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to two portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit and include a temperature reading. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 1800 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. Heavy duty door shall have a tempered glass outer window and a grab and pull handle with a 90° + opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 17 liter (.6 cubic ft.) cavity shall accommodate a standard 152 mm (6") deep half-sized pan. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have a removable, cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL for safety.



Warranty Certificate for this product can be found by locating

it on the ACP, Inc. website at: www.acpsolutions.com/warranty



Measurements are in millimeters * IEC 60 705 Tested ** Includes handle

Shipping Carton Size



W 556 (21 ⁷/₈") D 473 (18 ⁵/₈")

800-233-2366

225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A. Form # ACRR0930 Rev. 8/12

ACP commitment to quality may mean a change in specification without notice

319-368-8120 Product of the U.S.A Fax: 319-368-8198 © 2012 ACP Inc.™

www.acpsolutions.com

Printed in the U.S.A